



Collamat® 2610

Your first step. This labeller is intended as the first step to an automated labelling process. Maximizing the production output and quality is evident. High reliability is achieved through a simple and robust concept. Set up of the labeller on various lines and to various products is easiest possible. Collamat® 2610 fits ideal into either smaller productions for test series or for promotional labelling in existing lines. All to a very competitive price.

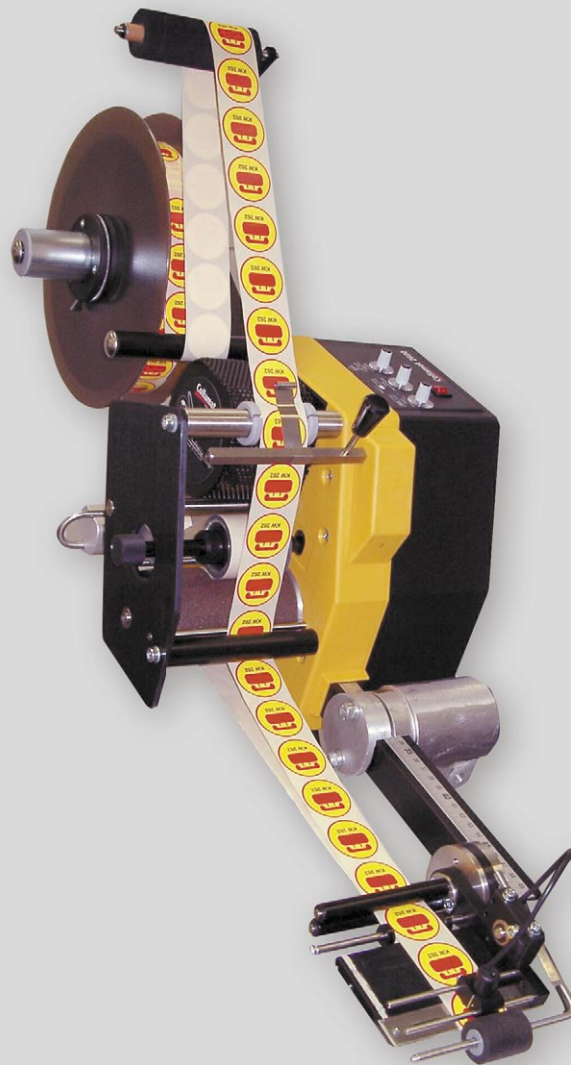

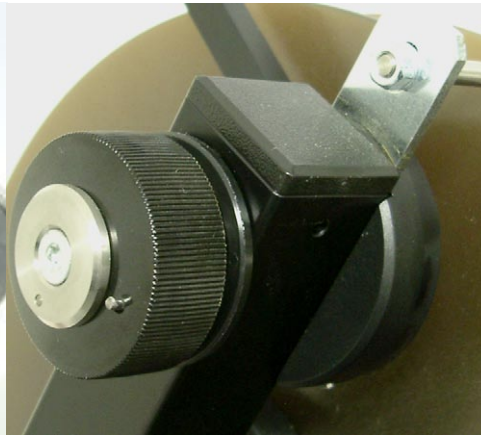

FEATURES

- Compact design – Minimal space required and so ideal to refit on existing production lines
- Flexibility – For top, bottom, and side applications
- Easy handling – Minimal set up and short change-over times
- Profitable – Cost ration makes small series and promotional labelling attractive
- Efficiency – A small investment for increasing production output
- Simple operation – Self explanatory control panel for minimal operating error
- Swiss made – No compromise on reliability or quality

TECHNICAL DATA

Dispensing speed:	3 - 15 m/m (10 - 50 ft/min)
Operational width:	10 - 95 mm (0.4 - 3.6/8 in)
Stop accuracy:	± 0.5 mm (1/16 in)
Label length:	10 mm - 2000 mm (1/2 - 78 in)
Control panel:	Integrated in traction unit
Settings by potentiometer:	Variable speed adjustment, label scanner sensitivity, pre-dispensing
Module rail:	500 mm (19.5/8 in)
Unwinder:	250 mm (9.7/8 in)
Rewinder:	Integrated in traction unit
Fix applicator:	Spring mounted roller
Mounting:	Left or right
Options:	Mounting Good's scanner horizontal
Approbation:	CE/Gost

All data are indicative and may be subject to alteration

HM Collamat AG
Pfeffingerring 201
CH-4147 Aesch

Phone: +41 (0)61 756 28 28
Fax: +41 (0)61 756 29 29
Web: www.collamat.ch
E-mail: contact@collamat.ch

Member of HM Group