


Collamat® 7600

The speed labeller. Collamat® 7600 with its speed range from 0 – 50 m/min is the ultimate labelling machine for high production output. Adding the very high precision of the unit makes it the preferred choice for advanced applications where speed and precision is a must. The easy handling for the operator, the modularity that makes integration easiest possible and the reliability, all at very competitive cost. This makes it the best solution for a production with high output and high demands on labelling quality.



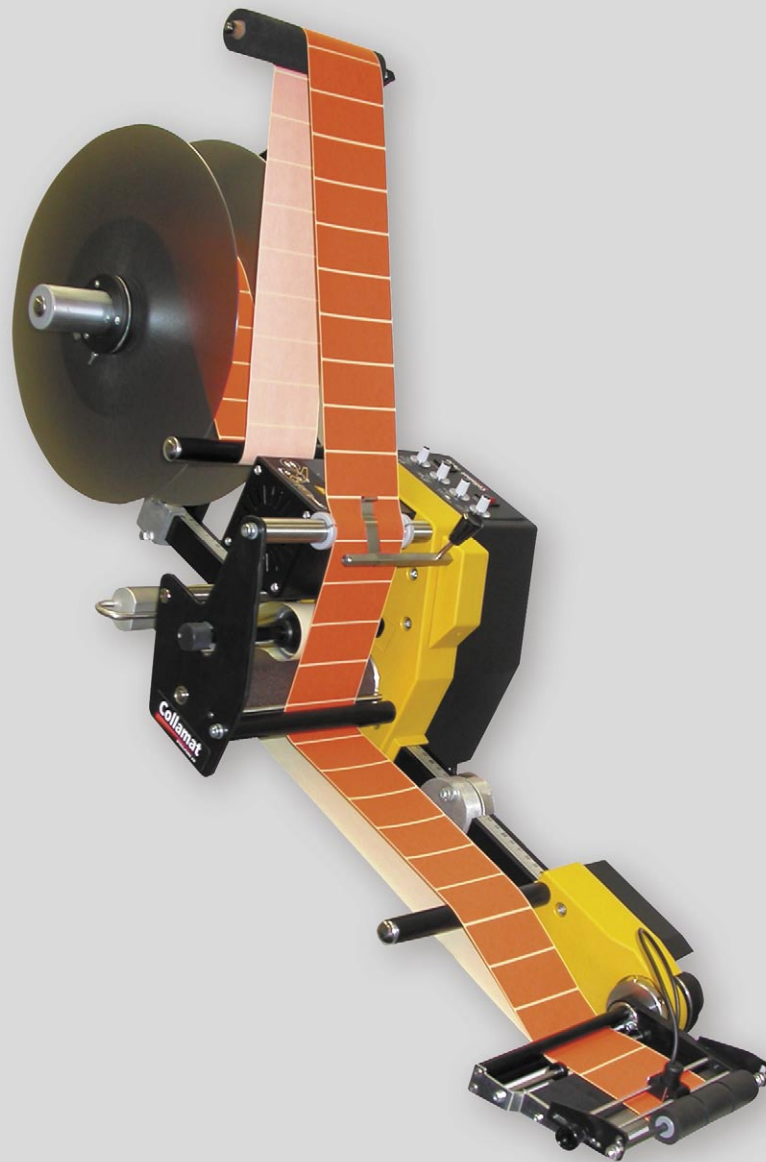

FEATURES

- Swiss accuracy – Not just speed is what you get but also best accuracy over the whole speed range
- Performance – The system enables you to cover a wide speed range and a comprehensive variety of applications
- Simplicity – Besides of performance and accuracy the system is easy to operate with its clear potentiometer control panel
- Collamat design – Controller, drive unit, rewinder and control panel integrated in one space-saving unit
- Carefree production – Encoder speed adaptation guarantees a constant labelling quality
- Modularity – Easy adaptation or re-configuration for new requirements with various accessories
- 4 steps – Do the set up for label scanner, predispensing, speed, and position – and you are ready to work

TECHNICAL DATA

	7610	7620
Passing width:	95 mm	160 mm
Dispensing speed:	3 - 50 m/min	3 - 40 m/min
Labelling accuracy:	± 0.5 mm	± 0.5 mm
Max label reel diameter:	350 mm (14 in)	350 mm (14 in)
Drive:	3 phase stepping motor, 500 steps	
Power supply:	110–240 V / 50–60 Hz / 310 VA	
Approbation:	CE/Gost	

All data are indicative and may be subject to alteration

HM Collamat AG
Pfeffingerring 201
CH-4147 Aesch

Phone: +41 (0)61 756 28 28
Fax: +41 (0)61 756 29 29
Web: www.collamat.ch
E-mail: contact@collamat.ch

Member of HM Group